



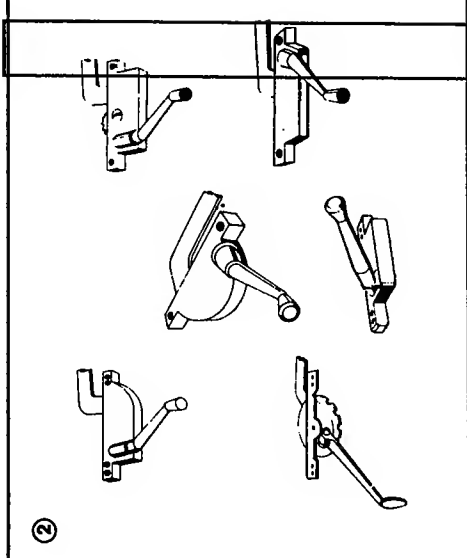

LEFT HANDED CASEMENT OPERATOR

FOR USE ON STANDARD WOOD CASEMENT WINDOWS 14" TO 20" WIDE AS REPLACEMENT FOR OPERATOR. FEATURES EASY INSTALLATION, SMOOTH OPERATION AND RUGGED CONSTRUCTION.

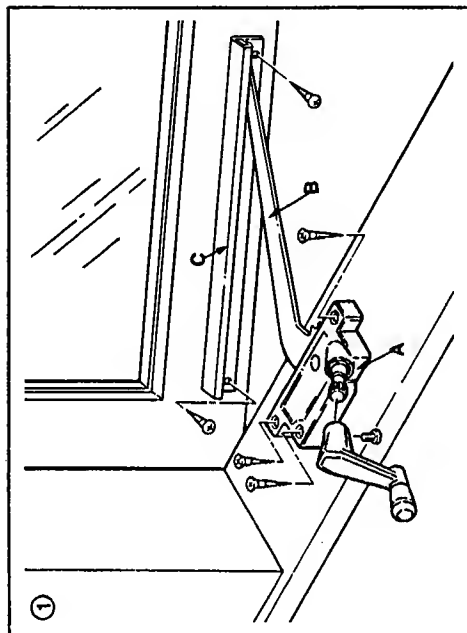


INSTALLATION INSTRUCTIONS

- TOOLS REQUIRED:** Phillips screwdriver, awl or pencil.
1. Detach present operator base (A) from sill and pull metal extending rod (B) out of window track (C).
 2. Position new operator in same location, connect metal extending rod (B) into window track (C), mount operator base (A) and secure to window sill. (See illustration 1)

NOTE: Ask for Ives C394 R.H. for right handed replacement applications. Ives C90 side window locks are recommended for use on casement windows for added security and weathertight protection.

IVES CASEMENT OPERATOR WILL REPLACE ANY OF THE OPERATORS SHOWN IN ILLUSTRATION 2.

394 - CASEMENT OPERATOR (Left Hand)



ASK FOR OTHER FINE HARDWARE BY H.B. IVES



0 44074 00725 1

WD CRSH DPRT C394Z69 BRNZ LH

© 1984 H.B. IVES, New Haven, CT 06508
MADE IN U.S.A.